



**POLE BASES**

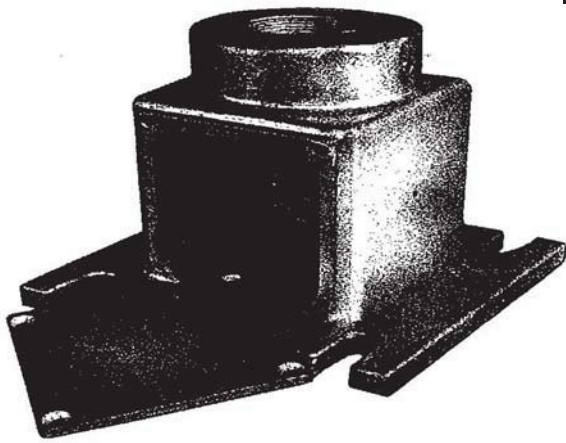

TYPE LPB

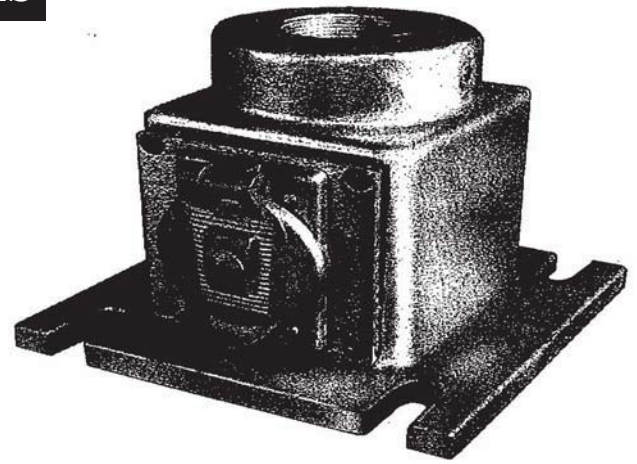

TYPE RPB  
(3 POLE 125 V. RECEPTACLE)

Inexpensive outdoor lighting standards are easily fabricated by combining Spring City's threaded ductile iron pole bases with a conduit or pressure pipe and fixture of your choice. Great rigidity between hollow base and pipe upright is achieved by the deep tapped hub and its strong locking engagement with the pipe. The junction chamber is ample for splicing, grounding, etc. and is tapped for 1/4"-20 ground stud. Each base is drilled and tapped for two 3/8"-16 stainless steel headless set screws, 180 degrees apart, to prevent wind-turning of the pipe. All bases can be supplied with receptacles for use with tools, appliances, supplementary lighting, etc. Type CPB base is the same as RPB with the addition of a 208 V. receptacle cover on the side opposite of the 125 V. receptacle. List price includes hot-dip galvanizing, gasket for the door, but not the anchor bolts or the ground stud. Also available at an additional cost are ground fault receptacles.

PIPE SIZE	PLAIN COVER	THREE POLE RECEPTACLE COVER	COMBINATION RECEPTACLE COVER	HEIGHT	OUTSIDE SIZE (SQUARE)	ANCHOR BOLT CENTERS (SQUARE)	ANCHOR BOLT SIZE	BOTTOM OPENING*	APPROX. WT. LBS.
	CATALOG NUMBER	CATALOG NUMBER	CATALOG NUMBER						
2"	LPB 200	RPB 200	CPB 200	7-7/8"	8-15/16"	6-5/8" x 6-5/8"	1/2"	4-1/2" x 4-1/2"	30
2 1/2"	LBP 250	RPB 250	CPB 250	7-7/8"	8-15/16"	6-5/8" x 6-5/8"	1/2"	4-1/2" x 4-1/2"	30
3"	LPB 300	RPB 300	CPB 300	7-7/8"	8-15/16"	6-5/8" x 6-5/8"	1/2"	4-1/2" x 4-1/2"	30
4"#	LPB 400	RPB 400	CPB 400	9-7/8"	9-7/8"	7-3/4" x 7-3/4"	3/4"	5-1/2" x 5-1/2"	46

\*4-1/2" square opening permits four 1" conduit stubs; 5-1/2" square opening permits four 1-1/4" conduit stubs.  
#Normally furnished with drilled anchor bolt holes instead of slotted openings.



**LIGHTING APPLICATIONS**

- o Waste Water Treatment Plants
- o Piers & docks
- o Railway platforms
- o Service stations
- o Walkways & driveways
- o Dams
- o Marinas
- o Swimming pools
- o Playgrounds
- o Parking Areas

**OTHER APPLICATIONS**

- o Mounting signs
- o Mounting police call boxes
- o Mounting fire boxes
- o Mounting traffic signals
- o Mounting yard speakers
- o Mounting electrical enclosures

